




Elfin IS High Resolution Inkjet Printer

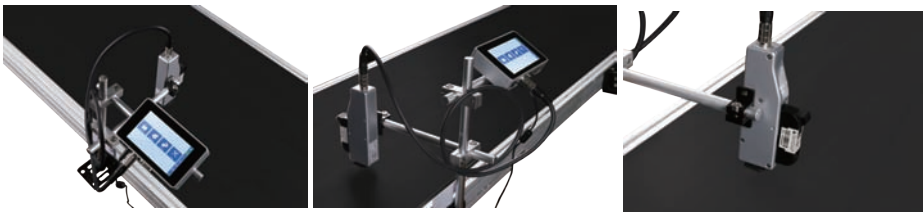

**For More Information Contact: Jose G. Manzano /
Melahel Global Solutions / +1868 7298553 /
24 Saddle Rd., San Juan, Trinidad. W.I. /
melahelgs@gmail.com /
www.melahelglobalsolutions.com**

Parameters

Specification	Controller: 151*93*32mm (H*W*D) / 5.9*3.7*1.3 inch Printhead: 175*52*33mm (H*W*D) / 6.9*2.0*1.3 inch
Language	Chinese, English, Japanese, French, German, Spanish, Portuguese and Russian
Resolution	50~600DPI
Counters	Can be set in Series No, Carton No, Pallet No, etc
Printable heights (mm)	1~12.7mm
Printing speed	0-60 m/min (300 DPI) 0-30 m/min(600 DPI)
Conveyor speed	Can be set, auto-calculated or use external synchronizer
Barcode	UPCA, UPCE, EAN13, EAN8, INT25, CODE39, CODE128, EAN128, PDF417, DATAMATRIX, QR
Date format	Production date, expiry date with several formats for option
Screen	5inch 800*480 resolution color LCD touch screen
Port	1) Ethernet: support PC software communication protocol SDK. 2) USB2.0: Support U-Disk 3) DB15: For external devices like photocell, synchronizer or alarm kit.
Ink management	Identify ink type automatically and use the best printing parameters Original HP ink cartridge guaranteed Automatic measuring system for ink consumption
Installation	Standard side printing, down printing bracket and anti-shock bracket, users can install according to their needs
Power Supply	AC 100V-240V/50-60HZ, 30W (Dedicated AC adaptor)
Certificate	CE, FCC



Controller and Printhead Separated

Separated type, suitable for different installation environment.



Online Edit

Edit directly on the 5 inch touch screen.



Economic and Practical

A good printer for integration of various equipment.



Chinese Input

Support Chinese Input, in multiple fonts.